

# Evidence of Performance

Air permeability, water tightness, resistance against wind load, operating forces, mechanical properties, mechanical durability



## Expert statement

Nr. 15-001232-PR04  
(GAS-A01-0203-en-01)









Client	CKM Extrusion Sp. z o.o. Ul. Kanalowa 2 98-220 Zdunska Wola Poland
Product	Single tilt and turn window Double combined side hung & turn window with opening meeting stile 5-sash tilt and turn window with fixed mullions
Designation	SYSTEM R14 / T-MODERN
Performance related product details	Material: PVC-U / white
Special features	-/-

**Basis**  
EN 14351-1:2006+A1:2010  
  
Test standard:  
EN 1026:2000-06  
EN 1027:2000-06  
EN 12046-1:2003-11  
EN 12211:2000-06  
EN 14608:2004-06  
EN 14609:2004-06  
Corresponds to the national standards (e. g. DIN EN)

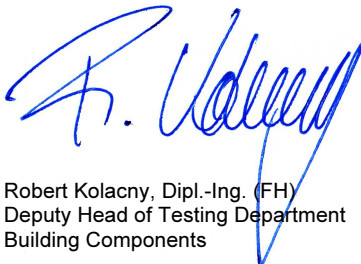
**Instruction for use**  
This expert statement serves to demonstrate the adjacent characteristics of windows.  
  
This expert statement does not cover all the performance characteristics listed in the product standard.

**Validity**  
The data and results refer solely to the tested and described specimen. Classification remains valid as long as the product and the above basis remain unchanged. The results can be extrapolated under the manufacturer's own liability subject to observance of the relevant specifications set out by the applicable product standard. This test/evaluation does not allow any statement to be made on any further characteristics regarding performance and quality of the construction presented, in particular the effects of weathering and ageing were not taken into account.

**Notes on publication**  
The ift-Guidance Sheet "Advertising with ift test documents" applies. The cover sheet can be used as an abstract.

Sample	1	2	3
Representation			
Overall dimensions (WxH)	920 mm x 2400 mm	1800 mm x 2300 mm	2700 mm x 1910 mm
Prüfung	Classification		
 Air permeability EN 12210	4	4	4
 Watertightness EN 12208	5A	3A	5A
 Resistance against wind load EN 12207	C4 / B4	C1 / B2	C3 / B3
 Operating forces EN 13115	1	1	1
 Mechanical properties EN 13115	4	4	4

ift Rosenheim  
21.08.2015

  
Robert Kolacny, Dipl.-Ing. (FH)  
Deputy Head of Testing Department  
Building Components

  
Rolf Schnitzler, Dipl.-Ing. (FH)  
Operating Product Officer  
Building Components

**Contents**  
The expert statement contains a total of 4 pages.

- 1 Order
- 2 Basis
- 3 Assessment
- 4 Results and statement